



MANIFOLDS

Brass manifold (also applicable to stainless steel)

The brass manifold can be used in both residential and utility applications. It can be used in the most diverse underfloor heating applications. The accessories for this distributor are shutoff valves for the hydraulic connection (may be fitted with a thermometer) and end pieces.

The end pieces make it possible to bleed and fill and drain the installation. This manifold is available for 2 to 12 groups. The brass manifold is provided with flow meters and a capacity of 0 – 6 L/h thanks to the low Kvs value of 1.7.


The material consists of Ms63;CW508N brass and the material of the accessories is MS58;CW614N brass.

All seals in the manifold are made of EPDM.

The mounting bracket is made of galvanized steel.

Technical information

maximum operational temperature (°C)	80
minimum operational temperature (°C)	-10
maximum operational pressure (bar)	6
maximum test pressure (24h, <30°C) (bar)	10

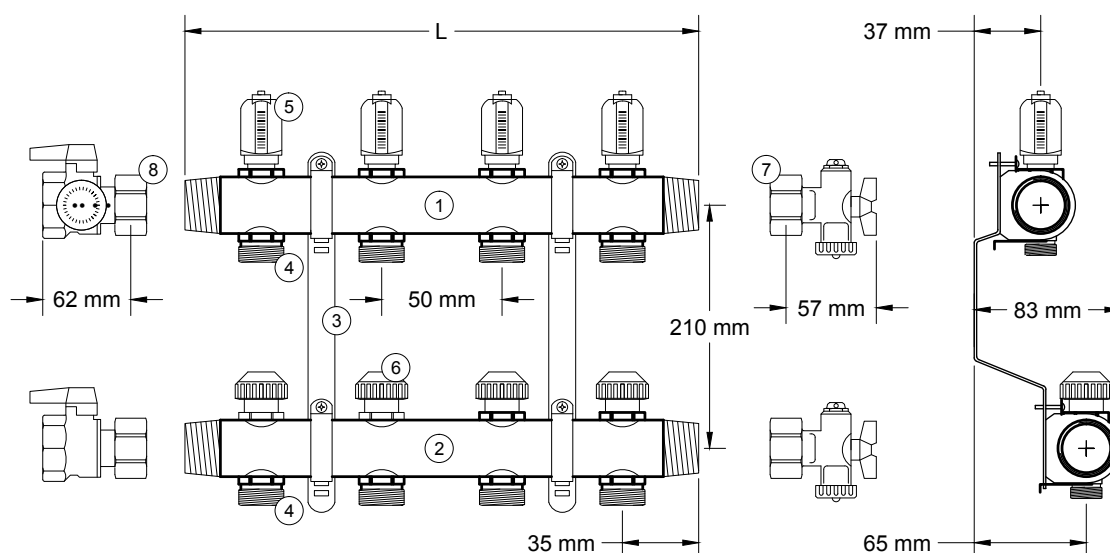

- 1 Supply, connection 1"
- 2 Return, connection 1"
- 3 Mounting bracket
- 4 Group outlet, 3/4" eurocone
- 5 Flow meter 0 – 6 L/Min (can be shut off)
- 6 Control valve (M30 x 1.5)
- 7 End piece 1"
- 8 Shutoff valve 1"

Groups	L (mm)
2	120
3	170
4	220
5	270
6	320
7	370
8	420
9	470
10	520
11	570
12	620